

UNCLASSIFIED

AD NUMBER	
AD012992	
CLASSIFICATION CHANGES	
TO:	UNCLASSIFIED
FROM:	CONFIDENTIAL
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 31 MAR 1953. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC.	
AUTHORITY	
28 Jan 1957 per doc markings ; NASA per DTIC form 55	

THIS PAGE IS UNCLASSIFIED

# AD 12992

## Armed Services Technical Information Agency

Reproduced by

### CLASSIFICATION CHANGED TO UNCLASSIFIED

The following National Advisory Committee for Aeronautics Reports have been regraded from Confidential to Unclassified per Authority of NACA Research Abstracts and Declassification Notice No. 111 dated 28 January 1957; Bulletin List No. 120

Date 1 APRIL 1977

Signed Richard E. Reedy  
OFFICE SECURITY ADVISOR

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

# UNCLASSIFIED

*Reproduced*

FROM

LOW CONTRAST COPY.

ORIGINAL DOCUMENTS  
MAY BE OBTAINED ON  
LOAN

FROM

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
DOCUMENT SERVICE CENTER  
U.B. BUILDING, DAYTON, 2, OHIO

SECURITY INFORMATION

CONFIDENTIAL

Copy 10  
RM 5L53D01

6015  
P. 2  
WCL5



# RESEARCH MEMORANDUM

for the

Bureau of Aeronautics, Department of the Navy

WIND-TUNNEL INVESTIGATION AT LOW SPEED OF THE YAWING  
STABILITY DERIVATIVES OF A 1/9-SCALE POWERED MODEL  
OF THE CONVAIR XFY-1 VERTICALLY RISING AIRPLANE

TED NO. NACA DE 373

By M. J. Queijo, W. D. Wolhart, and H. S. Fletcher

Langley Aeronautical Laboratory  
Langley Field, Va.

CLASSIFIED DOCUMENT

This material contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

NATIONAL ADVISORY COMMITTEE  
FOR AERONAUTICS

WASHINGTON

MAR 21 1953

CONFIDENTIAL

AD No 12-992  
ASTIA FILE COPY

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

## RESEARCH MEMORANDUM

for the

Bureau of Aeronautics, Department of the Navy

WIND-TUNNEL INVESTIGATION AT LOW SPEED OF THE YAWING  
STABILITY DERIVATIVES OF A 1/9-SCALE POWERED MODEL  
OF THE CONVAIR XFY-1 VERTICALLY RISING AIRPLANE

TED NO. NACA DE 573

By M. J. Queijo, W. D. Wolhart, and H. S. Fletcher

## SUMMARY

An experimental investigation has been conducted in the Langley stability tunnel at low speed to determine the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. Effects of thrust coefficient were investigated for the complete model and for certain components of the model. Effects of control deflections and of propeller blade angle were investigated for the complete model. Most of the tests were made through an angle-of-attack range from about  $-4^{\circ}$  to  $29^{\circ}$ , and the thrust coefficient range was from 0 to 0.7.

In order to expedite distribution of these data, no analysis of the data has been prepared for this.

## INTRODUCTION

Various investigations have shown that the dynamic stability characteristics of high-speed aircraft are critically dependent on certain mass and aerodynamic parameters and, hence, that reliable estimates of the dynamic stability of such aircraft can be made only if these parameters are determined accurately. The purpose of the present investigation was to determine the yawing stability derivatives of a powered model of the Convair XFY-1 vertically rising airplane from a series of low-speed tests in the Langley stability tunnel. These tests were made at the

CONFIDENTIAL

request of the Bureau of Aeronautics to aid in the development of the XFV-1 airplane. The results of a previous investigation to determine the static longitudinal and lateral stability derivatives of the same model are given in reference 1.

### SYMBOLS AND COEFFICIENTS


The data presented herein are in the form of standard NACA coefficients of forces and moments which are referred to the system of stability axes (fig. 1) with the origin at the projection on the plane of symmetry of the 14-percent point of the wing mean aerodynamic chord. This system of axes is defined as an orthogonal system having the origin at the assumed center of gravity and in which the Z-axis is in the plane of symmetry and perpendicular to the relative wind, the X-axis is in the plane of symmetry and perpendicular to the Z-axis, and the Y-axis is perpendicular to the plane of symmetry. Positive directions of forces, moments, and displacements are shown in figure 1.

b	theoretical wing span, 2.86 ft
d	local propeller blade chord, ft
h	maximum blade thickness at local chord, ft
D	propeller diameter, ft
q	dynamic pressure, $\frac{1}{2}\rho V^2$ , lb/sq ft
$r_o$	radial distance from propeller hub center line, ft
r	yawing angular velocity, radians per second
R	propeller radius, 0.889 ft
S	area of theoretical wing, 4.27 sq ft
V	free-stream velocity, ft/sec
$\alpha$	wing angle of attack, deg
$\beta$	sideslip angle, rad
$(\beta_o)_F$	front propeller blade angle measured at 0.75 R, deg
$\gamma$	angle of climb, deg

$\delta_e$	elevator deflection, positive trailing edge up, deg
$\delta_R$	rudder deflection, positive trailing edge to right, deg
$\psi$	angle of yaw, deg
$\theta$	local blade angle, deg
$\phi$	angle of roll, deg
$\rho$	mass density of air, slugs/cu ft
$L$	lift, lb
$X$	longitudinal force, lb
$Y$	side force, lb
$T$	thrust, lb ( $T = X_{\text{propellers on}} - X_{\text{propellers off}}$ , for complete model at $\alpha = 0^\circ$ )
$N$	yawing moment, ft-lb
$l$	rolling moment, ft-lb
$C_L$	lift coefficient, $L/qS$
$C_Y$	side-force coefficient, $Y/qS$
$T_c'$	thrust coefficient, $T/qS$
$C_n$	yawing-moment coefficient, $N/qSb$
$\frac{rb}{2V}$	yawing velocity parameter
$C_l$	rolling-moment coefficient, $l/qSb$

$$C_{Y_r} = \frac{\partial C_Y}{\partial \frac{rb}{2V}}$$

$$C_{l_r} = \frac{\partial C_l}{\partial \frac{rb}{2V}}$$


$$C_{n_T} = \frac{\partial C_n}{\partial \frac{rb}{2V}}$$

## Abbreviations:

W	wing
T <sub>u</sub>	upper tail
T <sub>L</sub>	lower tail
F	fuselage
P	propeller

## Subscripts:

F	front
L	left
R	right

## MODEL AND APPARATUS

The model used in this investigation was a 1/9-scale powered model of the Convair XPY-1 vertically rising airplane. Pertinent geometric characteristics of the model are given in figure 2. The wing was built around a core made from 1/2-inch-thick duralumin sheet and was built up to the proper contour with laminated mahogany. The fuselage and fins were constructed of laminated mahogany. All control surfaces were made of solid duralumin. The wing and fins had modified NACA 63-009 airfoil contours parallel to the model thrust line.

The propeller blades, for which the geometric characteristics are given in figure 3, were constructed of heat-treated duralumin and were driven by a 50-horsepower water-cooled motor. The motor was equipped with a dual-rotating gear box. Power for the model motor was supplied by a 75-kilowatt motor-generator set, which is part of the equipment of the Langley stability tunnel. Propeller speeds were measured by means of a Strobocorr unit in conjunction with an alternator driven directly by the model motor.



A two-strut support system was used to attach the model to a six-component balance system. Photographs of the model mounted on the struts are given as figure 4. All tests were made in the Langley stability tunnel in which yawing flow is simulated by curving the air stream about a stationary model (ref. 2).

### TESTS

All tests of this investigation were made at a dynamic pressure of 16 pounds per square foot, which corresponds to a Mach number of about 0.11 and a Reynolds number of  $1.28 \times 10^6$  based on the wing mean aerodynamic chord of 1.73 feet. Most of the tests were made with controls in the neutral position and with the front blades set at  $(\beta_0)_F = 25^\circ$ . A few tests were made to determine effects of blade angle on the yawing stability derivatives. In all cases the rear blades were set at  $1^\circ$  less than the front blades. Effects of control deflections also were investigated.

The yawing stability derivatives of three basic model configurations were investigated, and these configurations were as follows:

Wing with fuselage and propellers . . . . .	$W + F + P$
Wing with fuselage, upper tail, and propeller . . . . .	$W + F + T_u + P$
Complete model (wing with fuselage, upper tail, lower tail, and propeller) . . . . .	$W + F + T_u + T_L + P$

The characteristics of these configurations with propellers removed also were investigated.

The angle-of-attack range for all tests was from about  $-4^\circ$  to  $29^\circ$ . Tests were made at values of  $rb/2V$  of 0, -0.0281, -0.0581, and -0.0814.

Power-on data were obtained for several thrust coefficients from 0 to 0.7. The thrust coefficient was held constant for any particular case by holding the propeller speed constant while varying the angle of attack. The scope of this investigation is indicated in table I.

### CORRECTIONS

Approximate corrections for jet-boundary effects were applied to the angle of attack by the methods of reference 3. Blockage corrections were determined and applied by the methods of reference 4. Strut-tare corrections were determined experimentally and applied to all data.

## PRESENTATION OF RESULTS

The results of the investigation are presented in figures 5 to 9. The data, model configuration, and figure on which the data are shown are indicated in table I for convenience in locating desired information. All moment data are referred to the system of stability axes with the origin at the projection of the 14-percent wing mean aerodynamic chord on the plane of symmetry.

## CONCLUDING REMARKS

An experimental investigation has been made in the Langley stability tunnel at low speed to determine the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. Effects of thrust coefficient were investigated for the complete model and for certain components of the model. Effects of control deflection and of propeller blade angle were investigated for the complete model. Most of the tests were made through an angle-of-attack range from about  $4^\circ$  to  $29^\circ$ , and the thrust-coefficient range was from 0 to 0.7.

In order to expedite distribution of these data, no analysis of the data has been prepared for this paper.

Langley Aeronautical Laboratory,  
National Advisory Committee for Aeronautics,  
Langley Field, Va.

*M. J. Queijo*  
M. J. Queijo

Aeronautical Research Scientist

*W. D. Wolhart*  
W. D. Wolhart

Aeronautical Research Scientist

*H. S. Fletcher*  
H. S. Fletcher

Aeronautical Research Scientist

*Thomas A. Harris*

Approved:

Thomas A. Harris  
Chief of Stability Research Division

vr


## REFERENCES

1. Queijo, M. J., Wolhart, W. D., and Fletcher, H. S.: Wind-Tunnel Investigation at Low Speed of the Static Longitudinal and Lateral Stability Characteristics of a 1/9-Scale Powered Model of the Convair QY-1 Vertically Rising Airplane - TED NO. NACA DE 373. NACA RM SL53B20, Bur. Aero., 1953.
2. Bird, John D., Jaquet, Byron M., and Cowan, John W.: Effect of Fuselage and Tail Surfaces on Low-Speed Yawing Characteristics of a Swept-Wing Model as Determined in Curved-Flow Test Section of the Langley Stability Tunnel. NACA TN 2483, 1951. (Supersedes NACA RM L8G13.)
3. Silverstein, Abe, and White, James A.: Wind-Tunnel Interference With Particular Reference To Off-Center Positions of the Wing and to the Downwash at the Tail. NACA Rep. 547, 1936.
4. Herriot, John C.: Blockage Corrections for Three-Dimensional Closed-Throat Wind Tunnels, With Consideration of the Effects of Compressibility. NACA Rep. 995, 1950. (Supersedes NACA RM A7B28a.)

TABLE I

SUMMARY OF MODEL CONFIGURATIONS TESTED,  
TEST VARIABLES, AND DATA PRESENTED

Model configuration	Data presented	Figure
$W + F + T_u + T_L + P$ $(\beta_0)_F = 25^\circ, 35^\circ, 50^\circ$	$T_c'$ against propeller speed	5
$W + F$ $W + F + P, (\beta_0)_F = 25^\circ$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $C_L$ for various thrust coefficients	6(a)
$W + F + T_u$ $W + F + T_u + P, (\beta_0)_F = 25^\circ$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $C_L$ for various thrust coefficients	6(b)
$W + F + T_u + T_L$ $W + F + T_u + T_L + P, (\beta_0)_F = 25^\circ$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $C_L$ for various thrust coefficients	6(c)
$W + F + T_u + T_L$ $W + F + T_u + T_L + P, (\beta_0)_F = 35^\circ$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $C_L$ for various thrust coefficients	7
$W + F + T_u + T_L$ $W + F + T_u + T_L + P, (\beta_0)_F = 50^\circ$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $C_L$ for various thrust coefficients	8
$W + F + T_u + T_L + P, (\beta_0)_F = 25^\circ$ $T_c' = 0$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $\alpha$ for various control deflections	9(a)
$W + F + T_u + T_L + P, (\beta_0)_F = 25^\circ$ $T_c' = 0.2$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $\alpha$ for various control deflections	9(b)
$W + F + T_u + T_L + P, (\beta_0)_F = 25^\circ$ $T_c' = 0.4$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $\alpha$ for various control deflections	9(c)
$W + F + T_u + T_L + P, (\beta_0)_F = 25^\circ$ $T_c' = 0.7$	$C_{Y_r}, C_{l_r}, C_{n_r}$ against $\alpha$ for various control deflections	9(d)



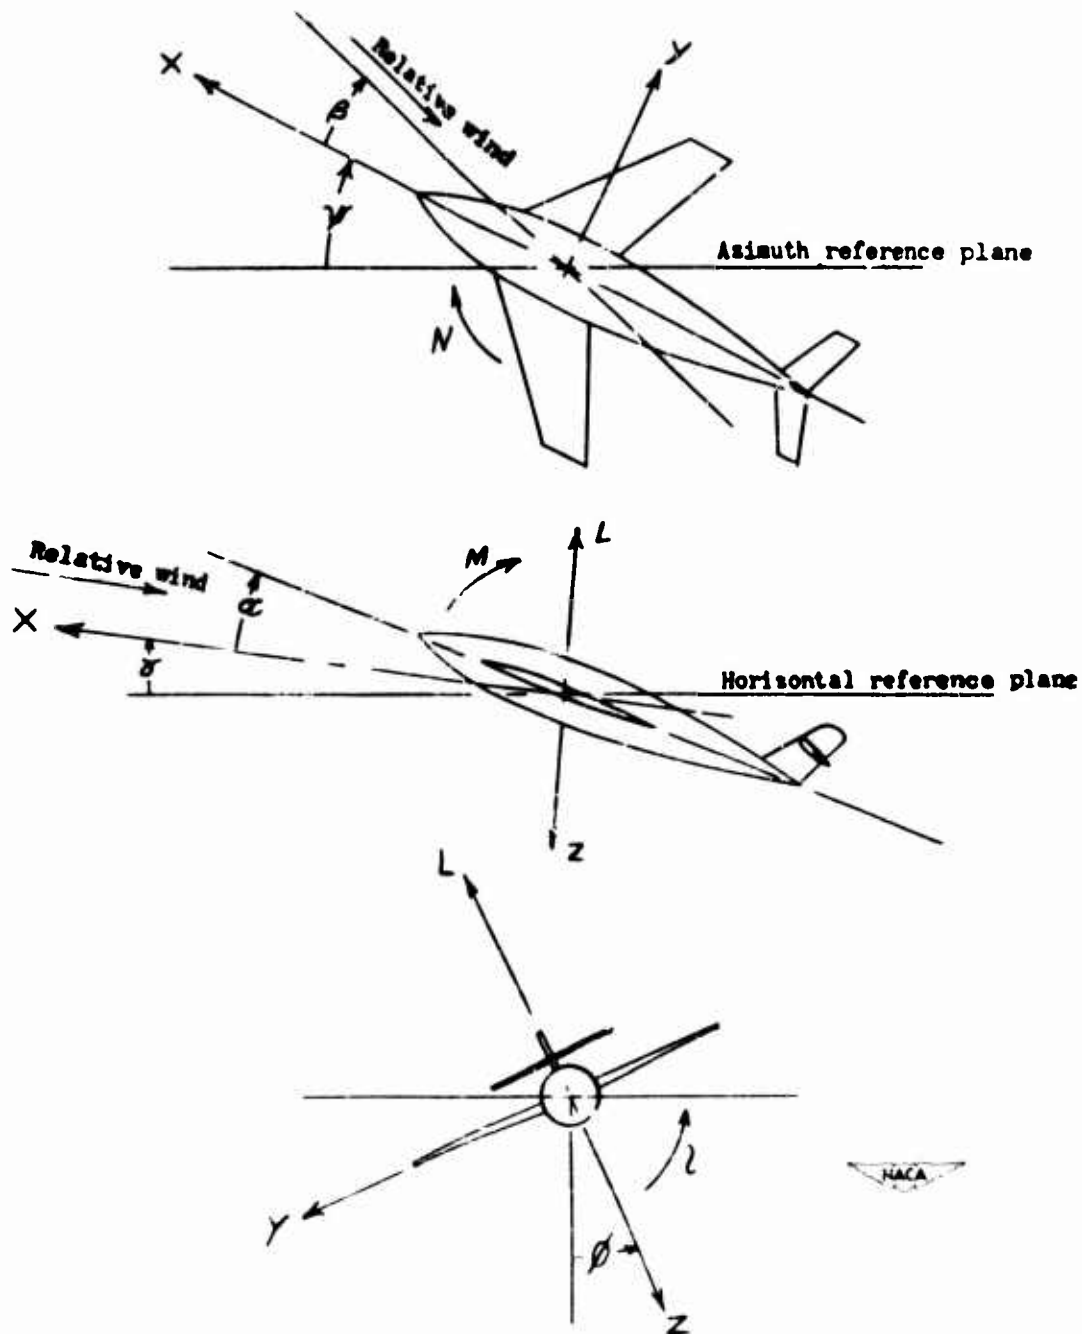


Figure 1.- System of stability axes. Arrows indicate positive direction of forces, moments, and displacements.

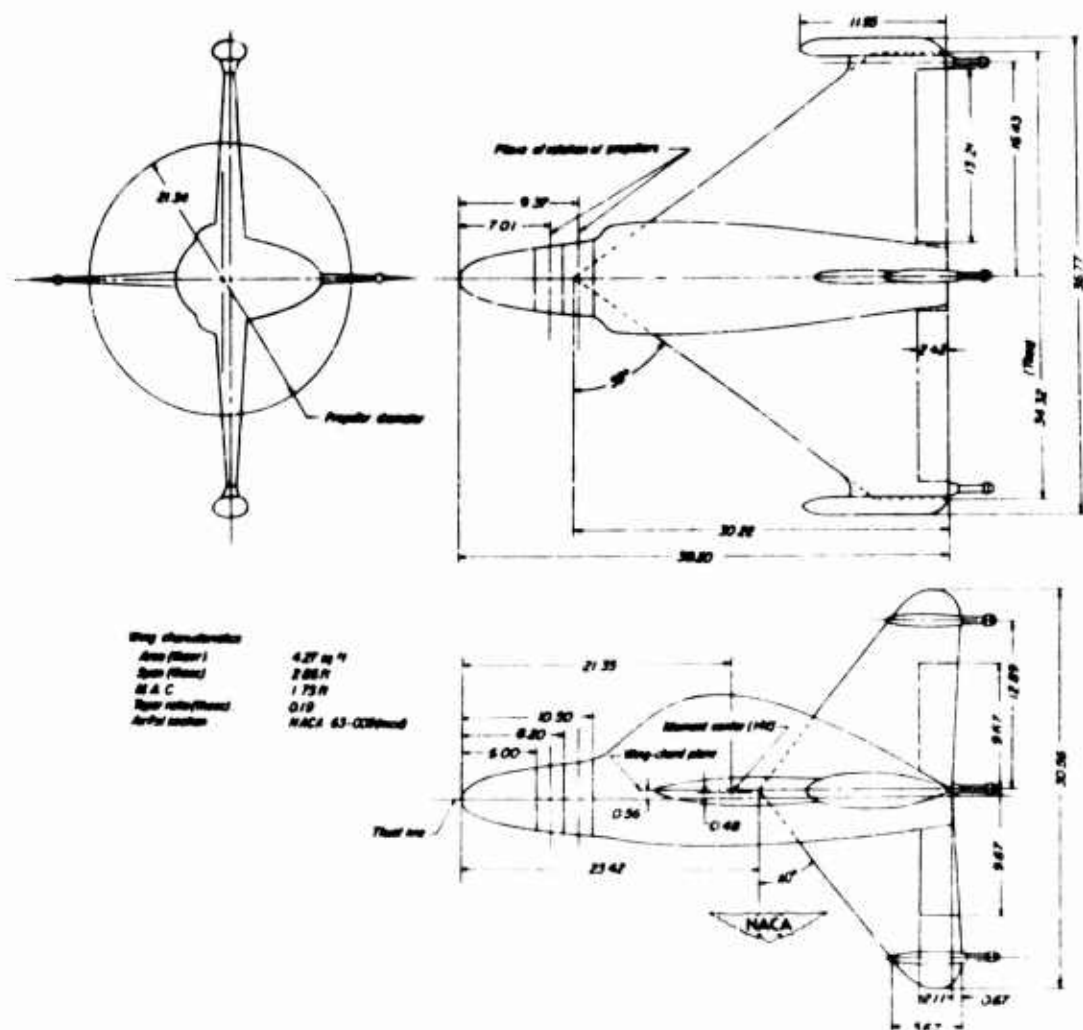


Figure 2.- Geometric characteristics of model. All dimensions are in inches.


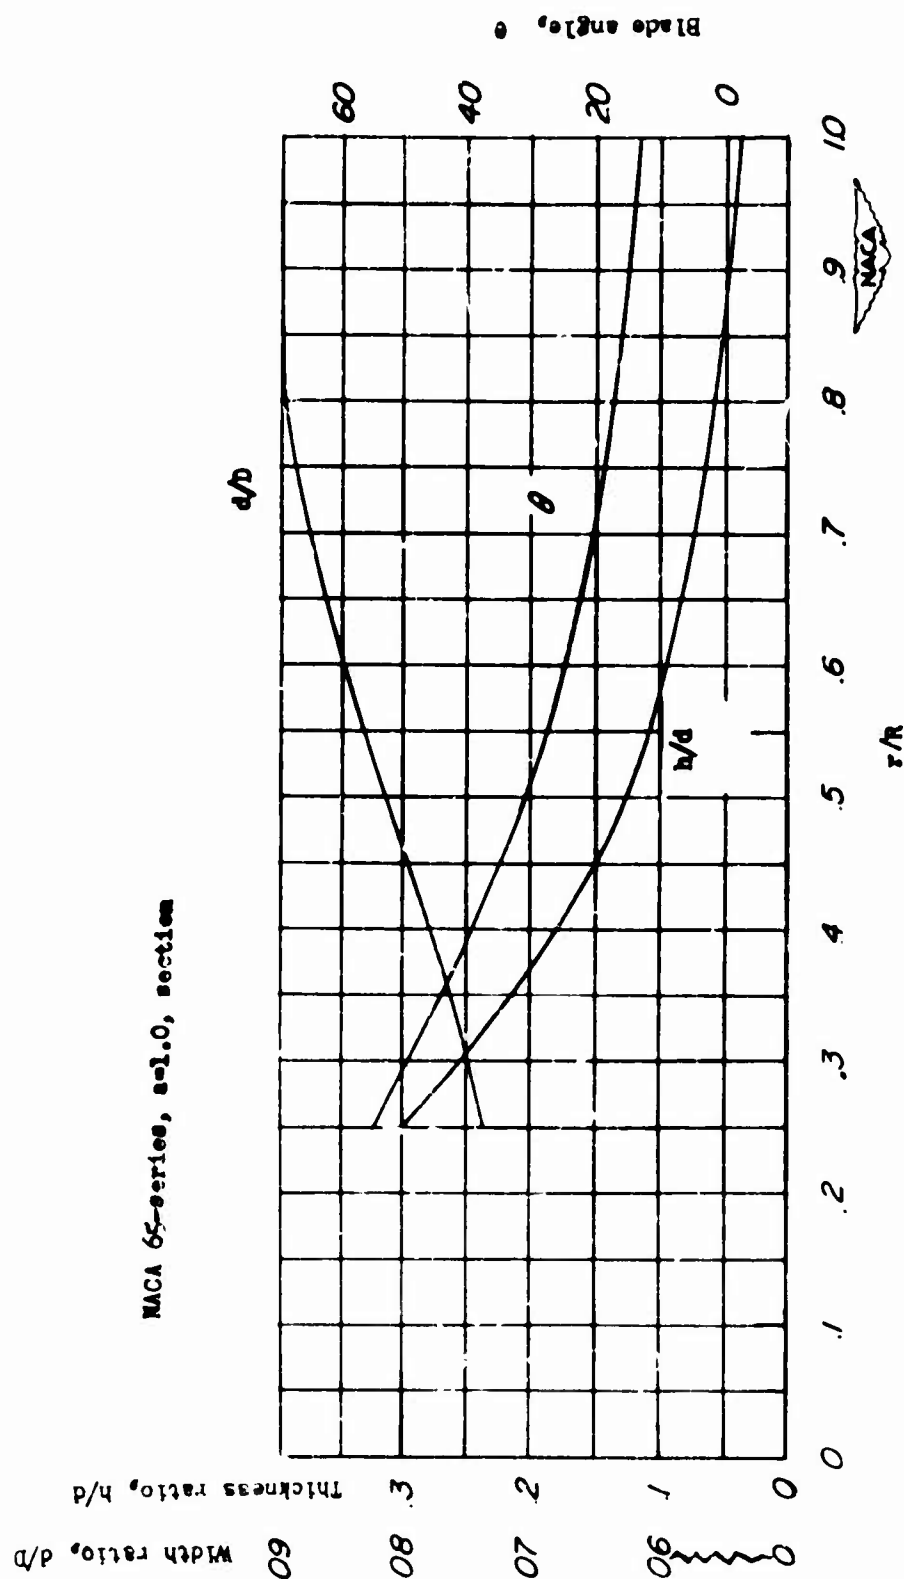



Figure 3.- Geometric characteristics of propeller blades used on a 1/9-scale model of the Convair XPY-1 vertically rising airplane.  
 $R = 0.889$  feet.



(a) Side view of model.

Figure 4.- Photographs of model used in investigation.

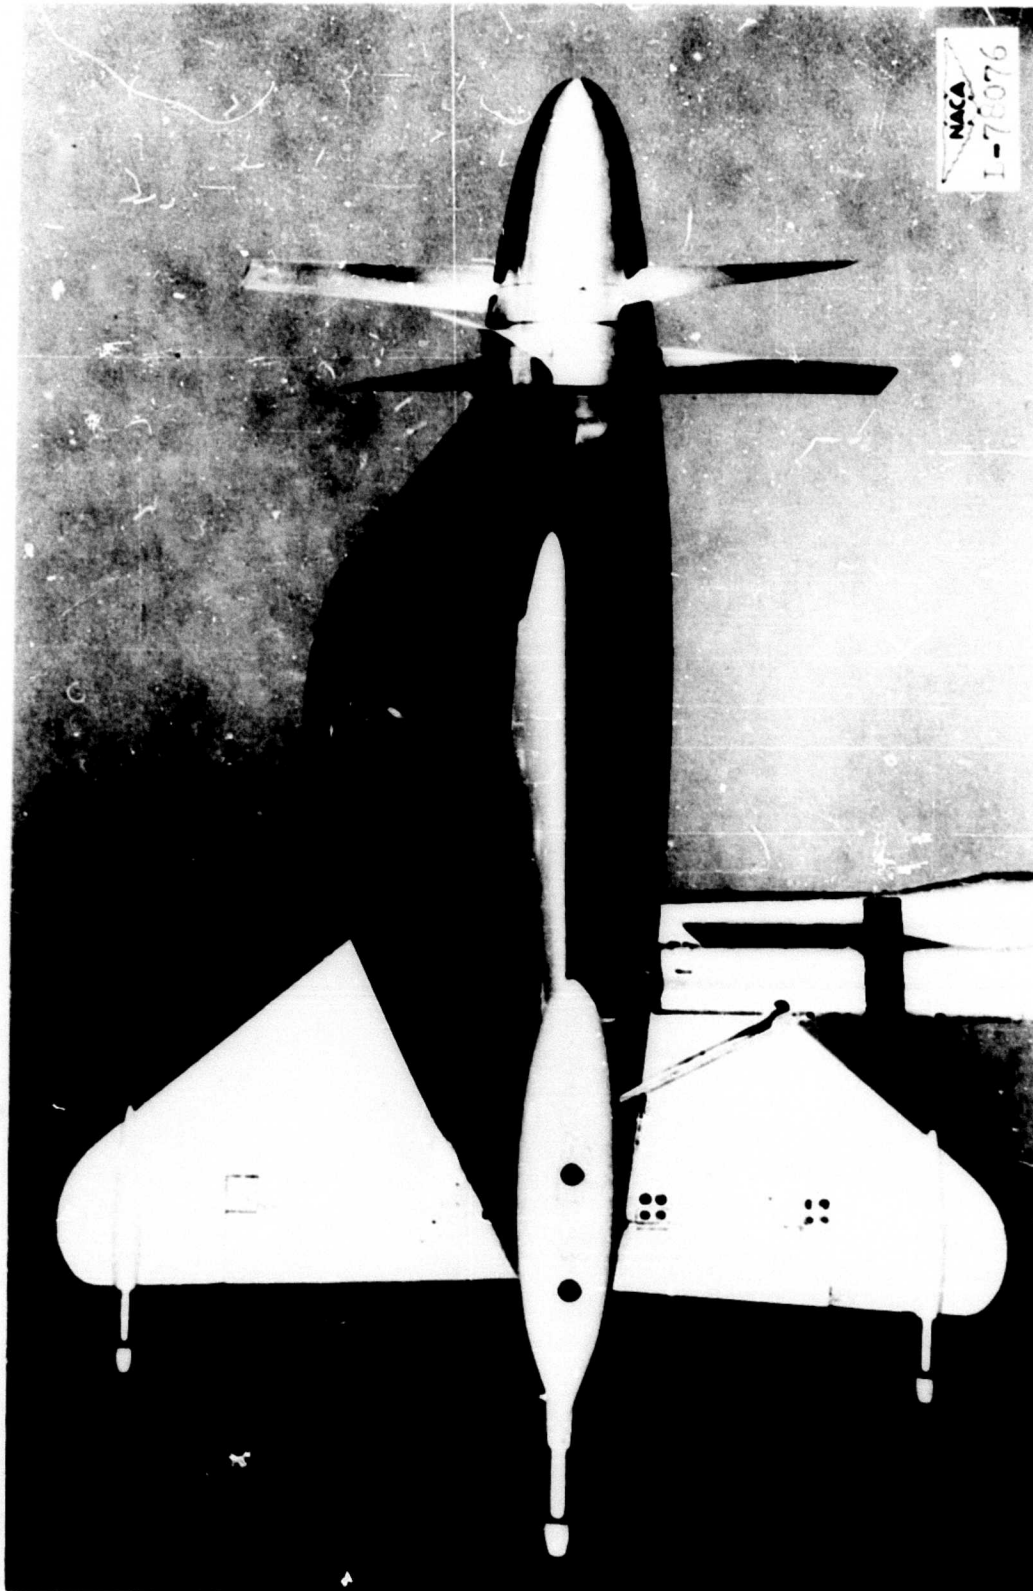

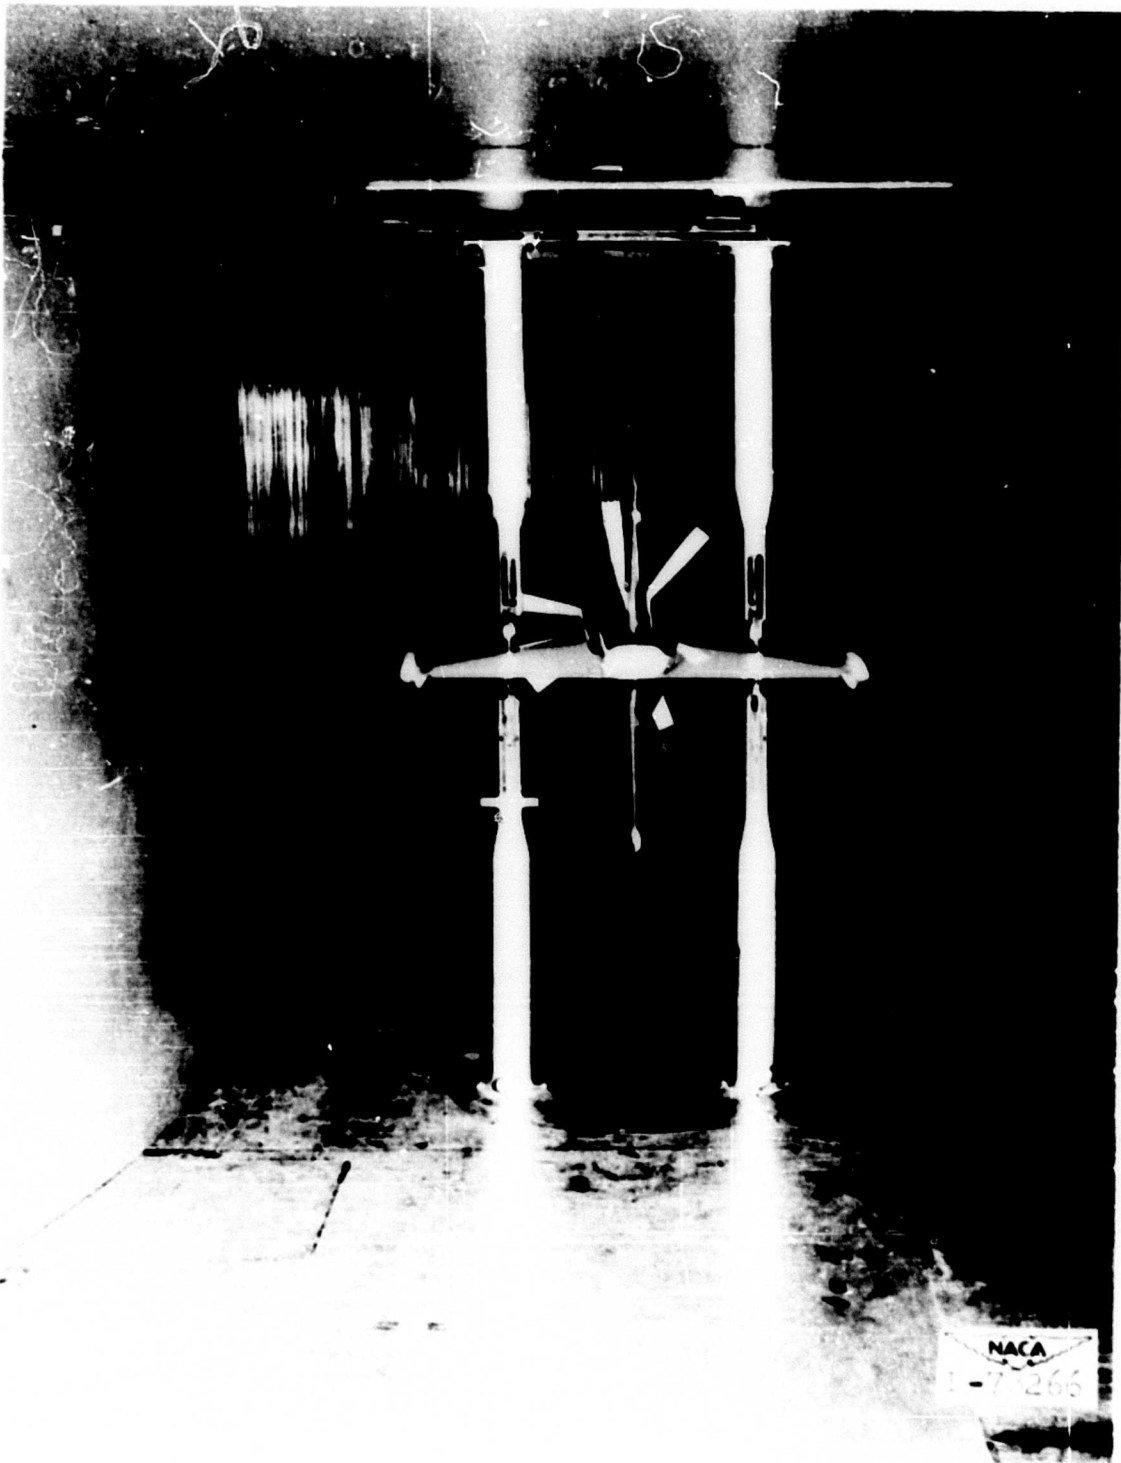

(b) Rear view of model with dummy struts used in tare tests.

Figure 4.- Concluded.



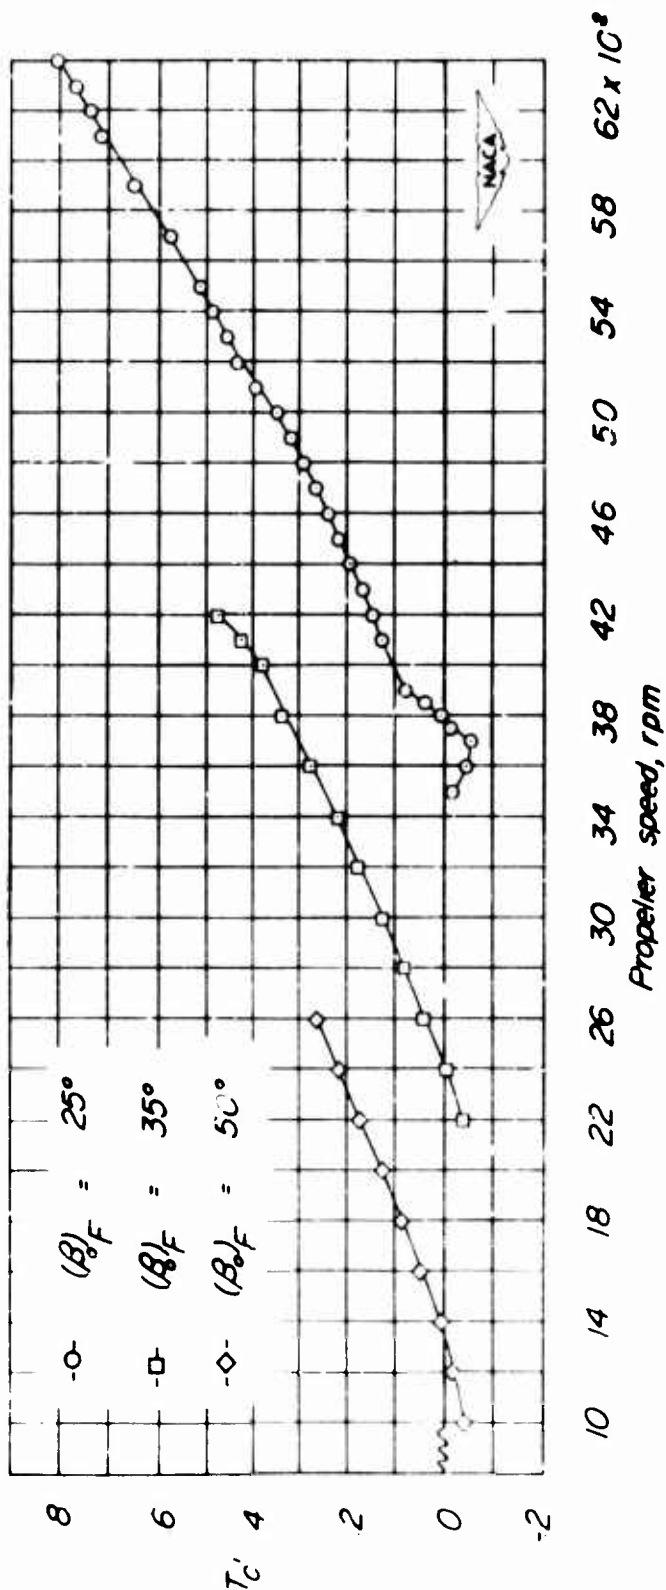


Figure 5.- Variation of thrust coefficient with propeller speed for various propeller-blade angles.  $\alpha = 0^\circ$ ;  $q = 16$  pounds per square foot; complete model.

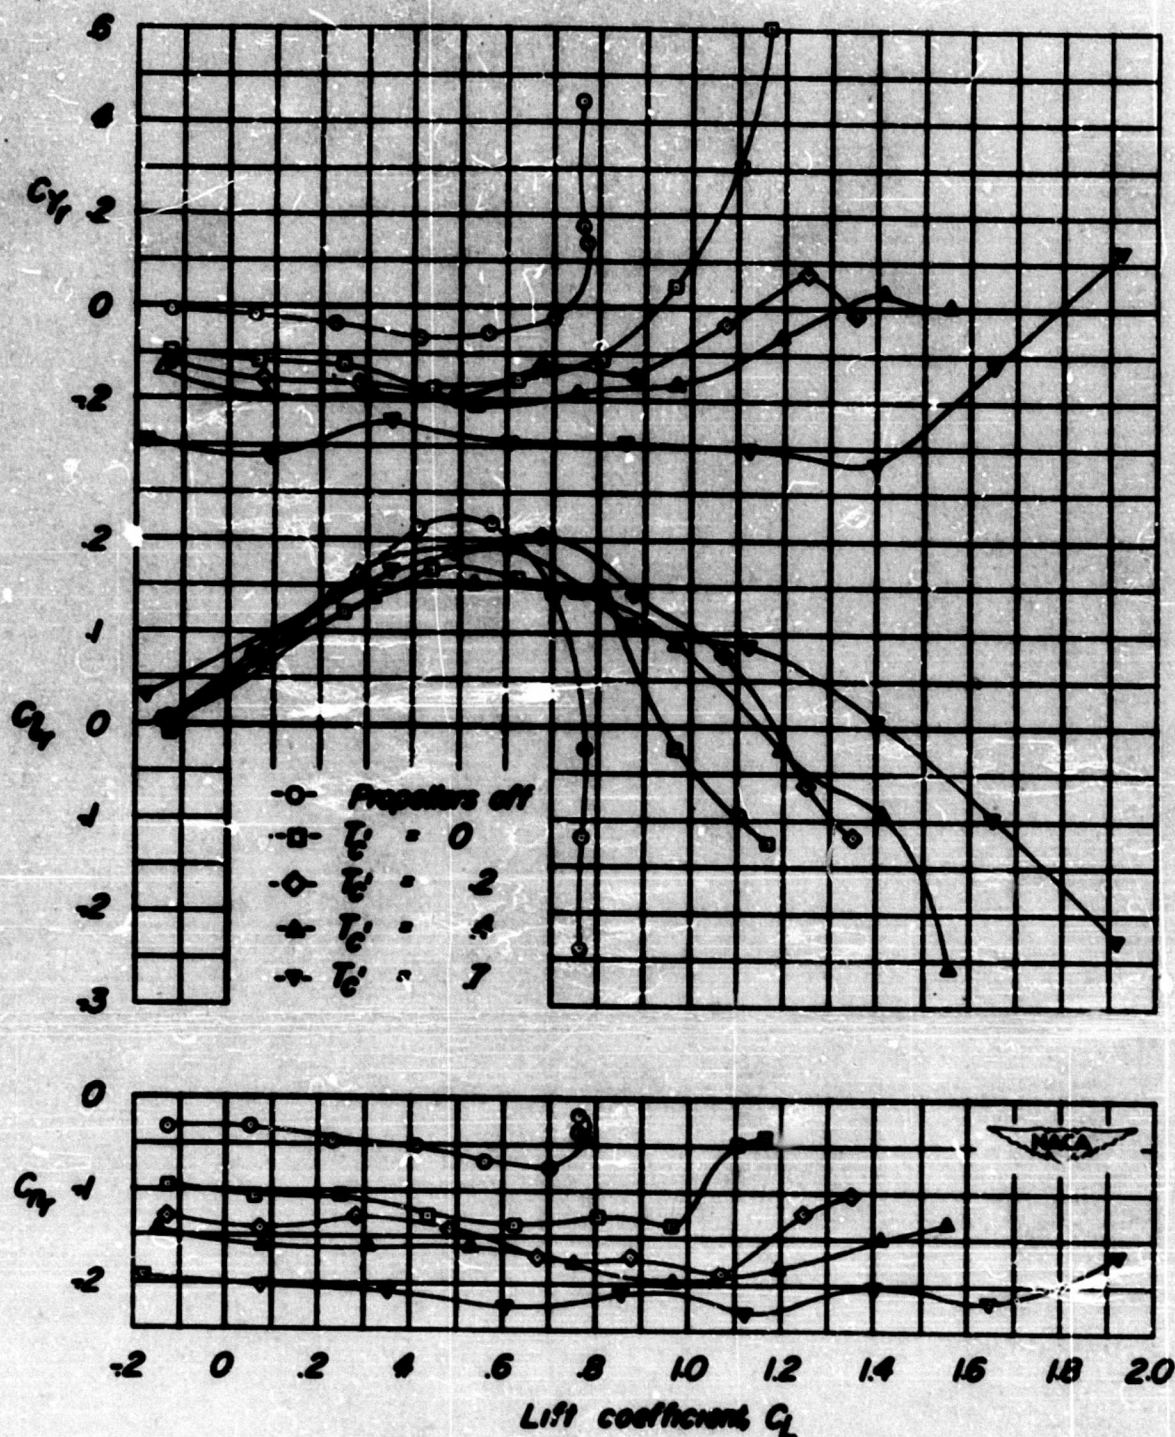


(a) Both fins off. Configurations W + F and W + F + P.

Figure 6.- Effect of thrust coefficient on the yawing stability derivatives of various components of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane.  $(\beta_0)_F = 25^\circ$ .

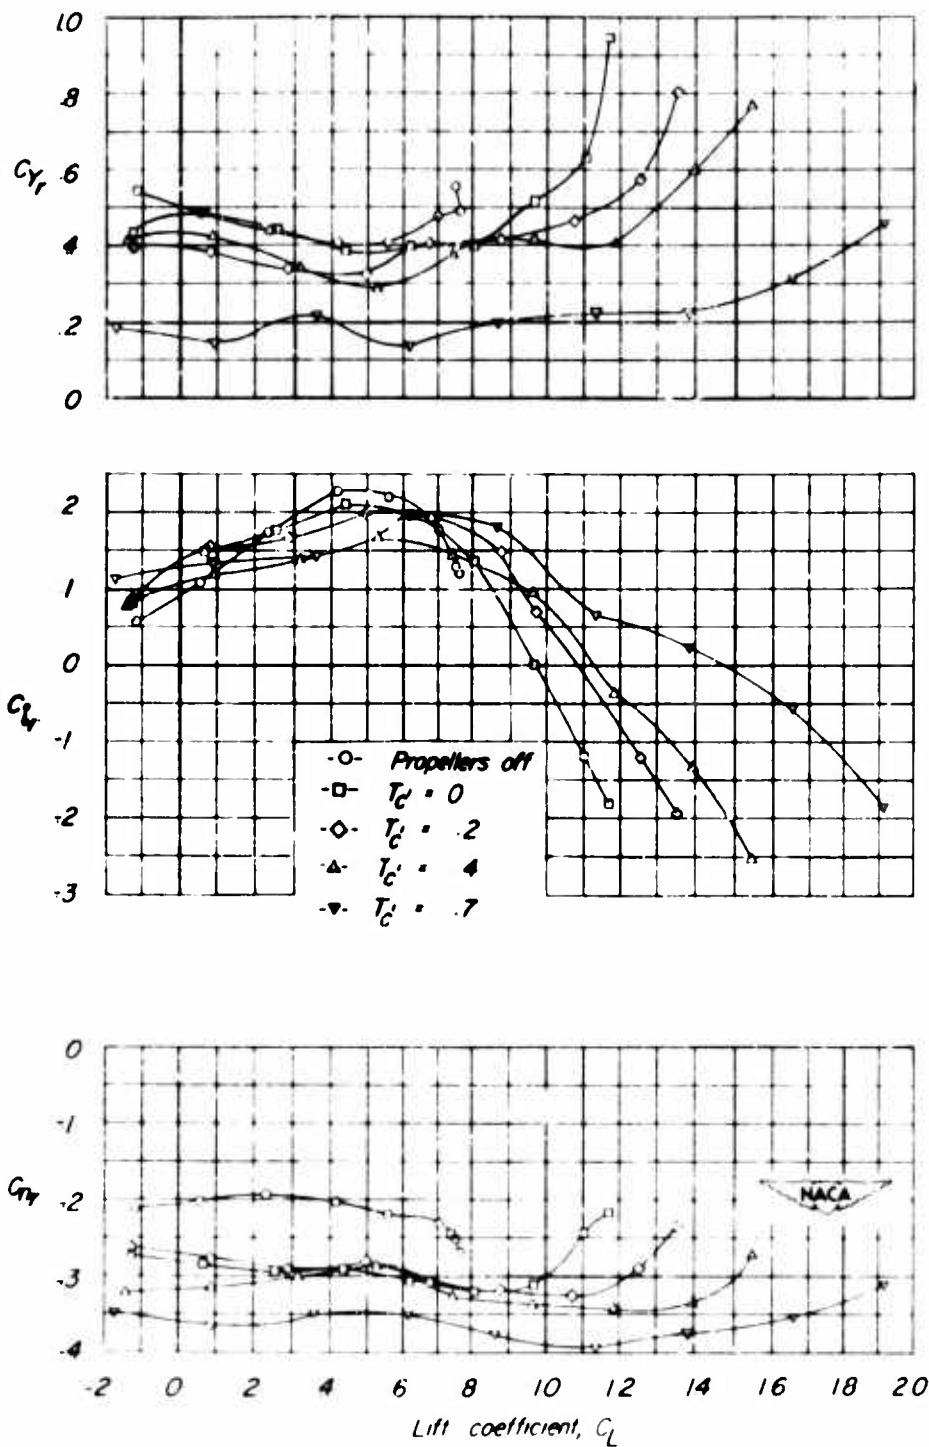

(b) Lower fin off. Configurations  $W + F + T_u$  and  $W + F + T_u + P$ .

Figure 6.- Continued.

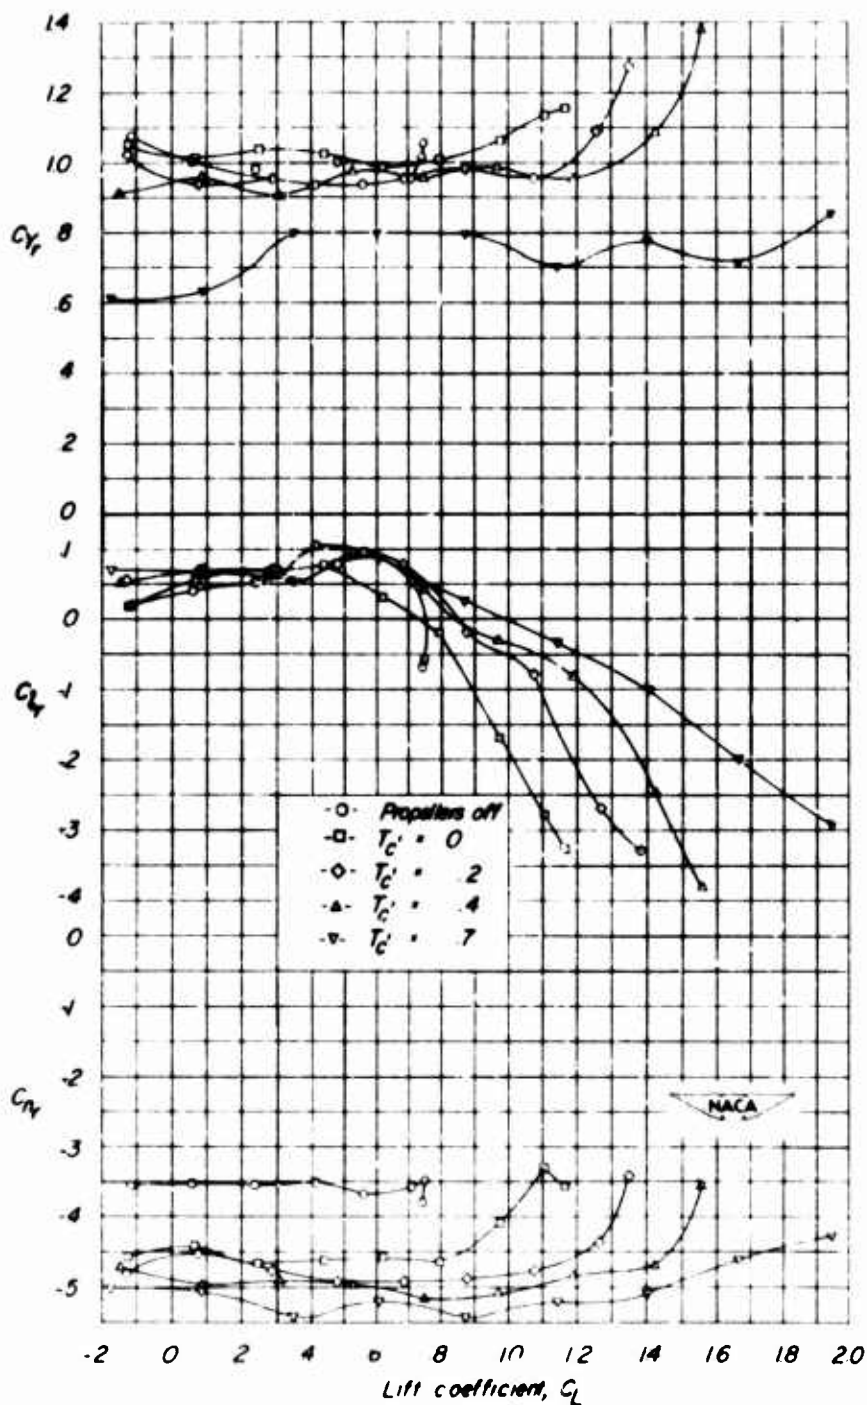

(c) Complete model. Configurations  $W + F + T_u + T_L$  and  $W + F + T_u + T_L + P$ .

Figure 6.- Concluded.

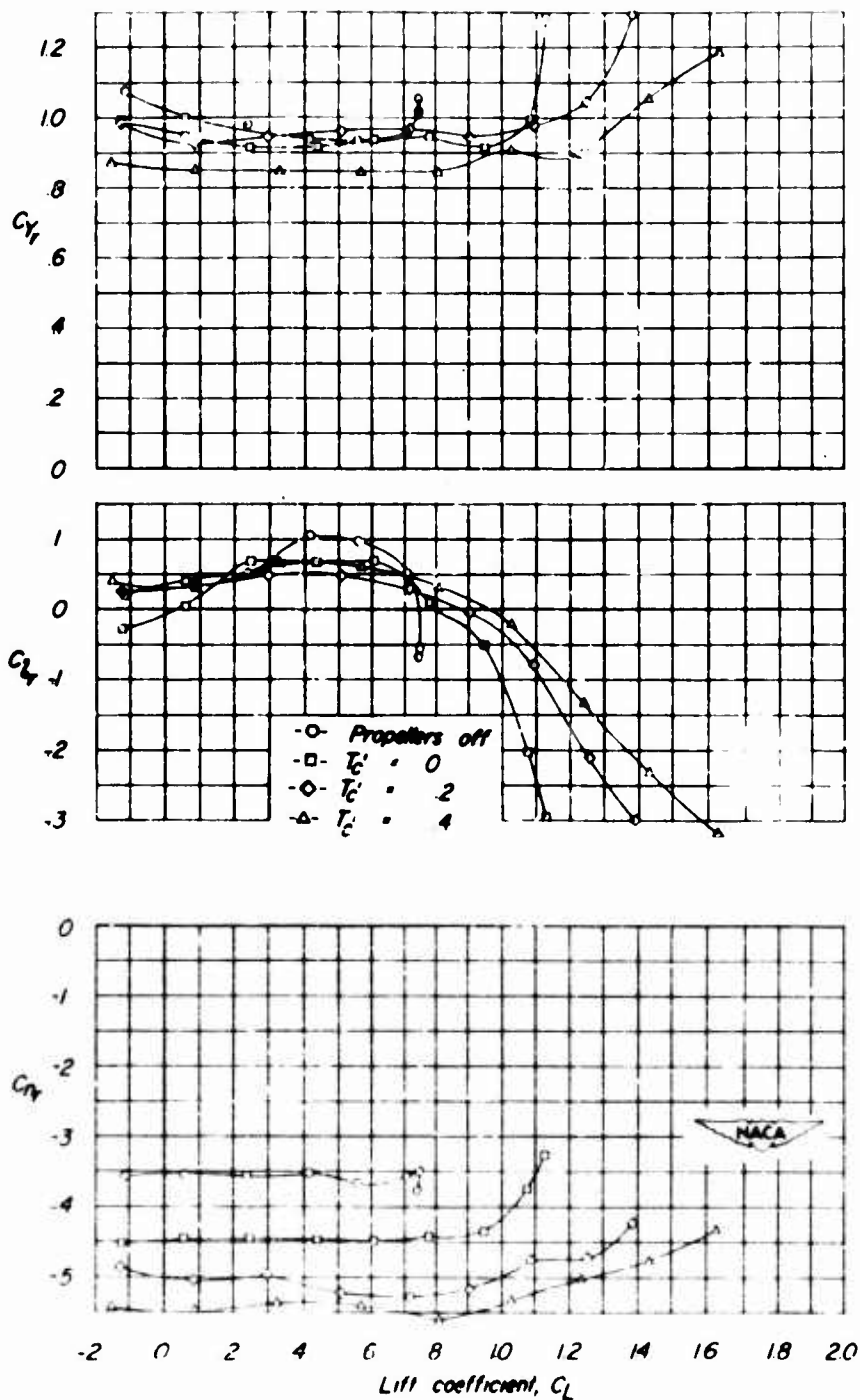


Figure 7.- Effect of thrust coefficient on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane.  $(\beta_0)_F = 35^\circ$ ; configurations  $W + F + T_u + T_L$  and  $W + F + T_u + T_L + P$ .




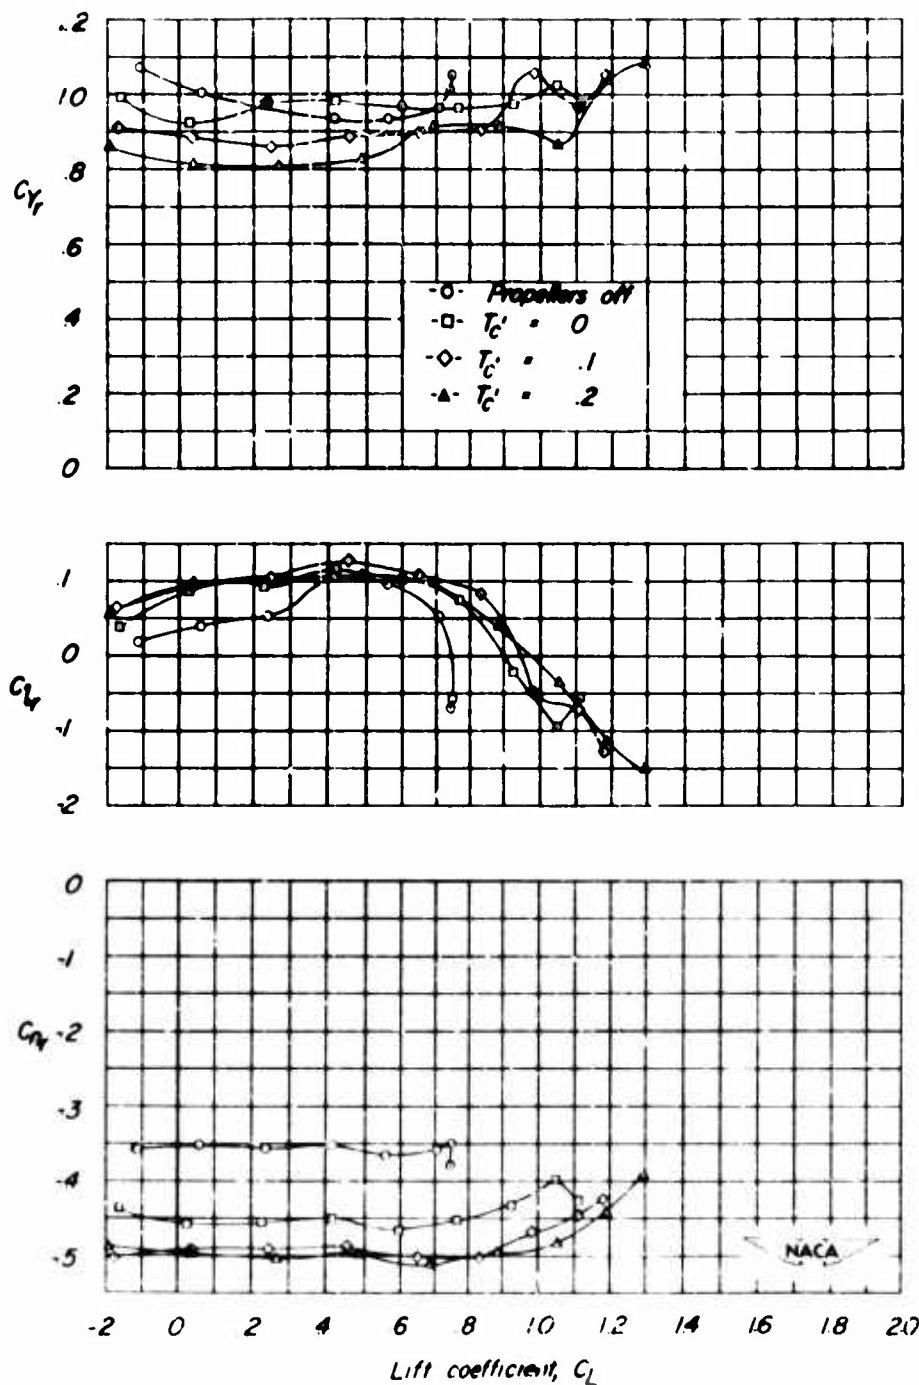


Figure 8.- Effect of thrust coefficient on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane.  $(\beta_0)_F = 50^\circ$ ; configurations  $W + F + T_U + T_L$  and  $W + F + T_U + T_L + P$ .



(u)  $T_c' = 0$ .

Figure 9.- Effect of control deflection on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane.  $(\beta_0)_F = 25^\circ$ ; configuration W + F +  $T_u$  +  $T_L$  + P.

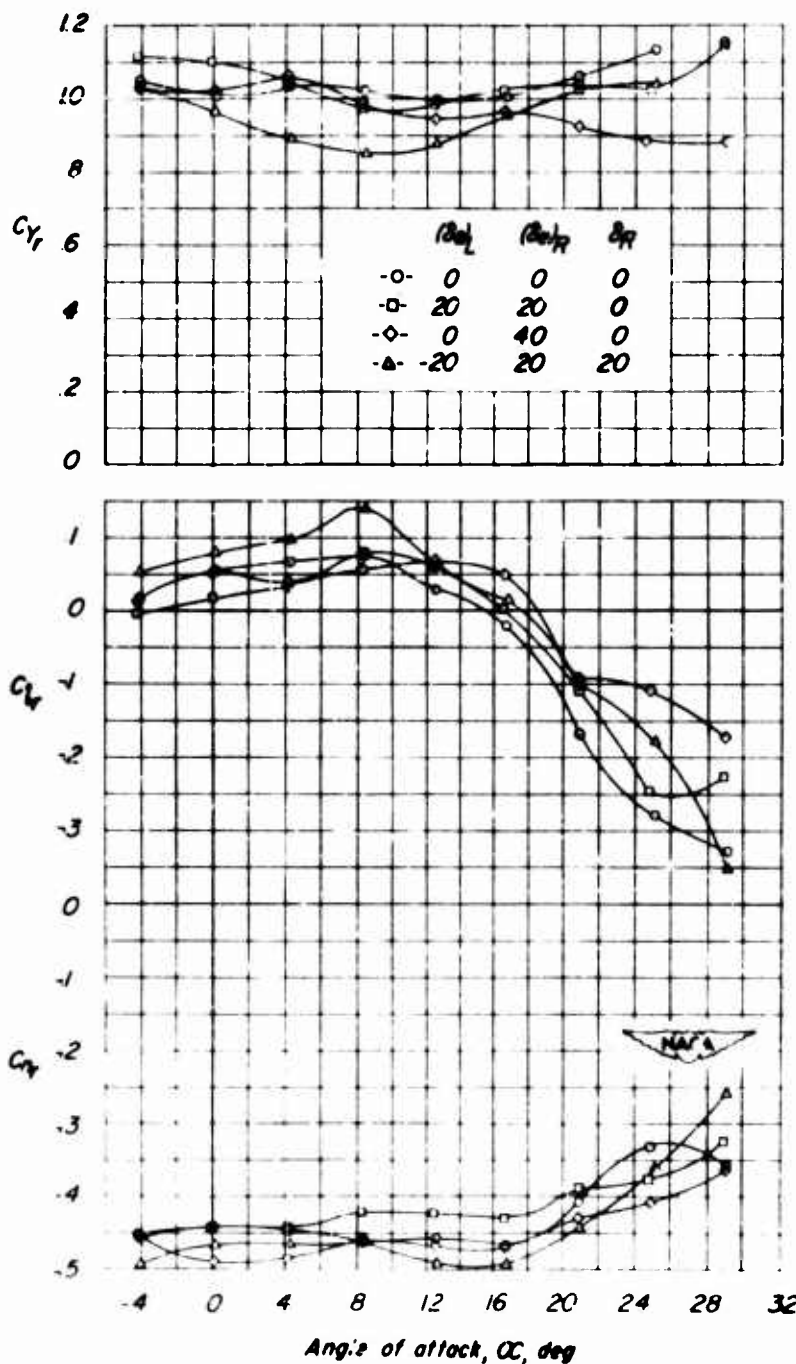

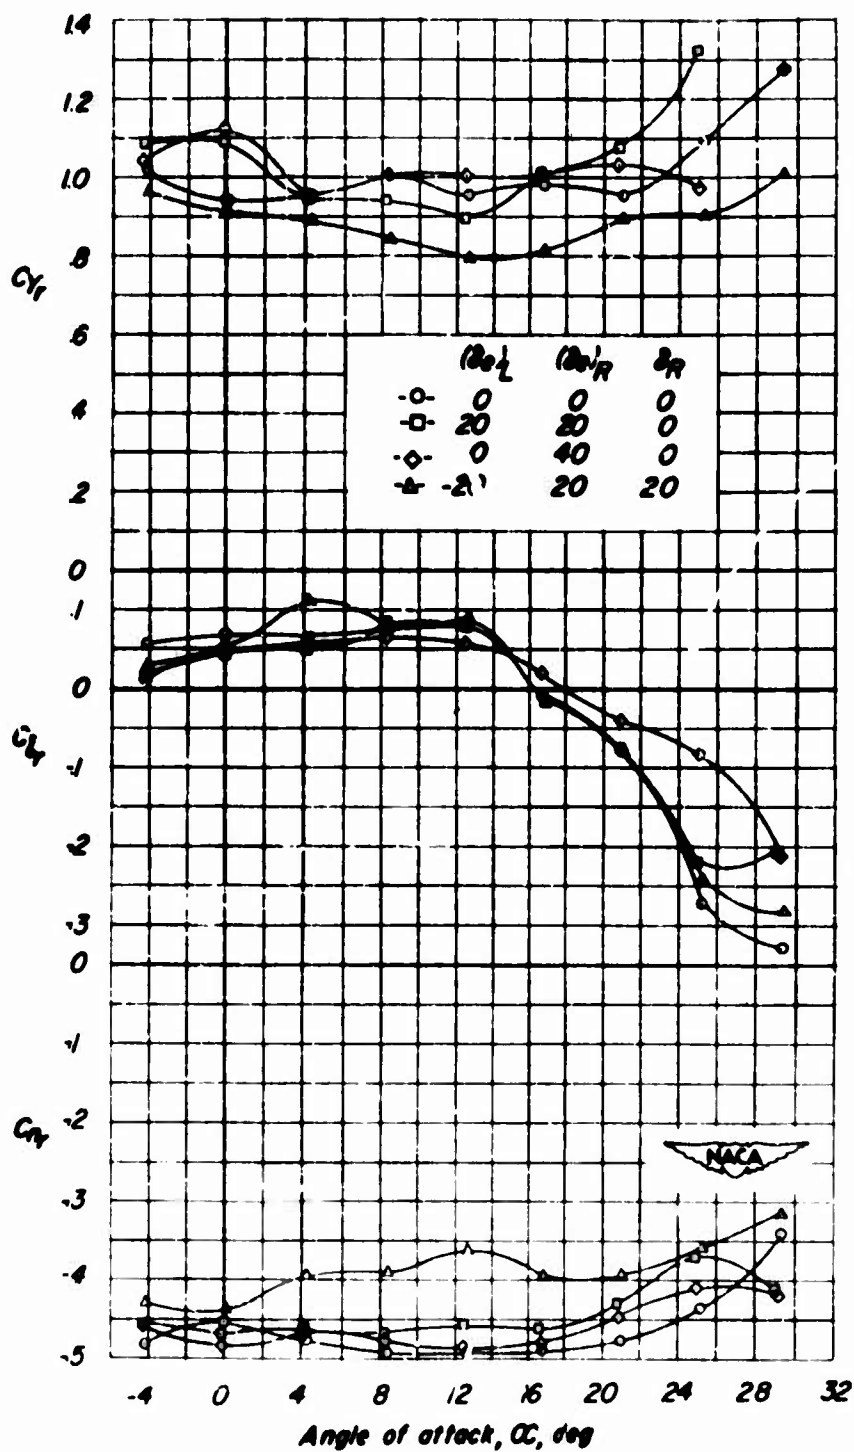
(b)  $T_c' = 0.2$ .

Figure 9.- Continued.


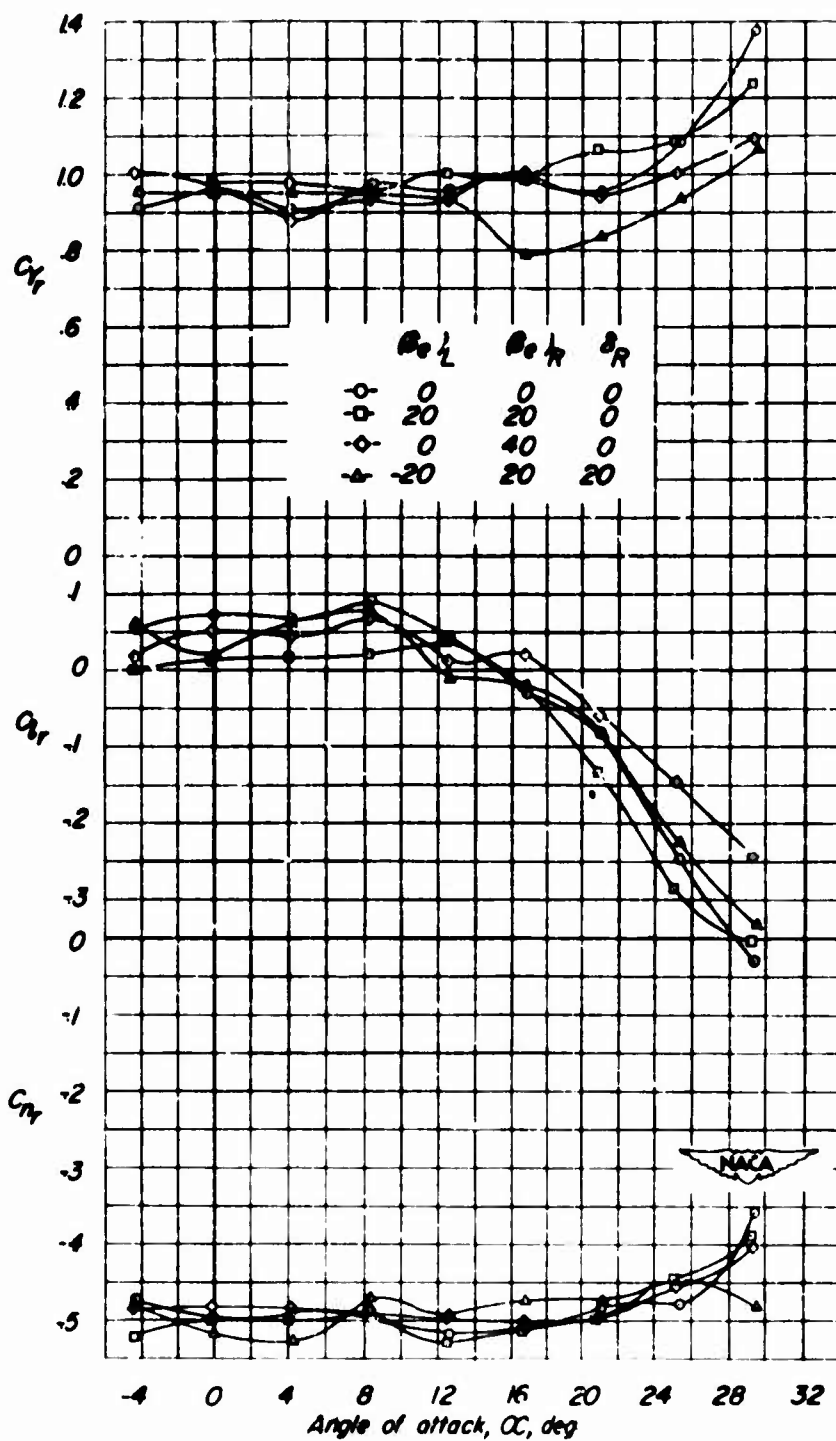
(c)  $T_c' = 0.4$ .

Figure 9.- Continued.

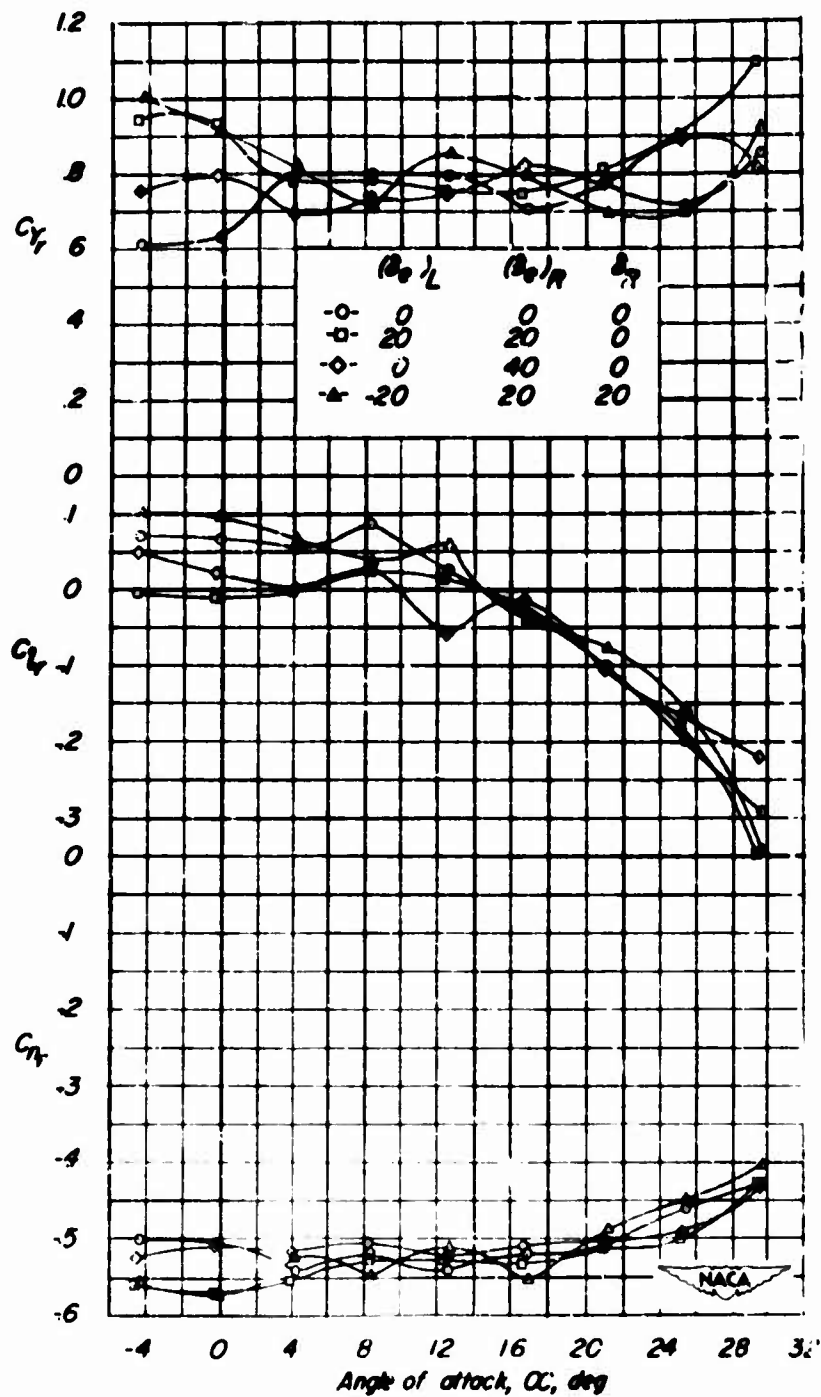

(d)  $T_c' = 0.7$ .

Figure 9.- Concluded.

AD 12992

# Armed Services Technical Information Agency

Reproduced by

## CLASSIFICATION CHANGED TO UNCLASSIFIED

The following National Advisory Committee for Aeronautics Reports have been  
regarded from Confidential to Unclassified per Authority of NACA Research Abstracts  
BY and Reclassification Notice No. 111 dated 28 January 1957; Bulletin List No. 120

Date 1 APRIL 1957

Signed *Richard E. Reedy*  
OFFICE SECURITY ADVISOR

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

# UNCLASSIFIED